


PHOTOVOLTAIC


FUSE-LINKS & FUSE HOLDERS FOR PHOTOVOLTAIC APPLICATIONS

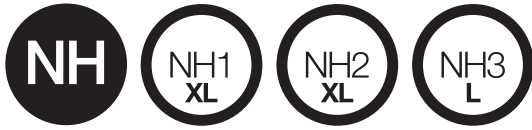


gPV
NH XL1500V DC
fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
1500V DC	50A...250A	30kA
	315...400A	10kA

DIMENSIONS

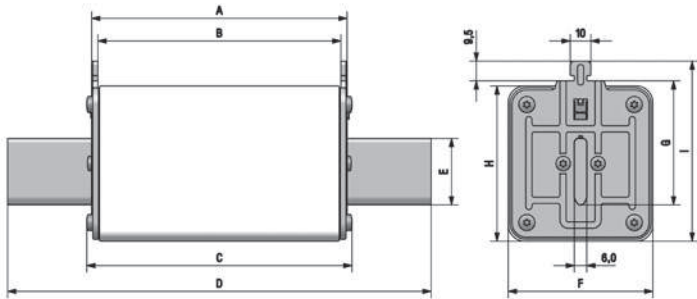


	A	B	C	D	E	F	G	H	I
NH1XL	126	120	129	191	20	39	40	52,5	64,5
NH2XL	122,6	117,6	126,7	205	25	53	48	60,5	72
NH3L	123,6	117,6	128,3	205	32	70	60	75	87

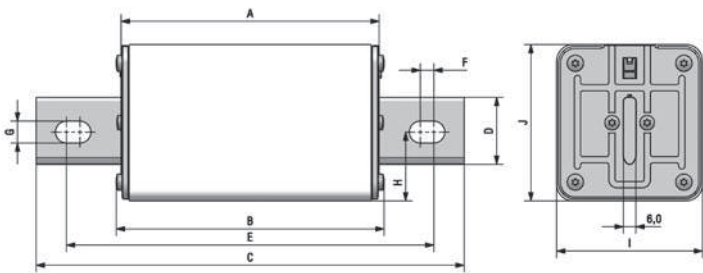




	A	B	C	D	E	F	G	H	I	J
NH1XL B	126	129	191	20	170,5	9	8,5	25,6	39	52,5
NH2XL B	122,6	126,7	205	25	173	9	10,5	27	53	60,5
NH3L B	123,6	128,3	205	32	176	6,5	10,5	33	70	75

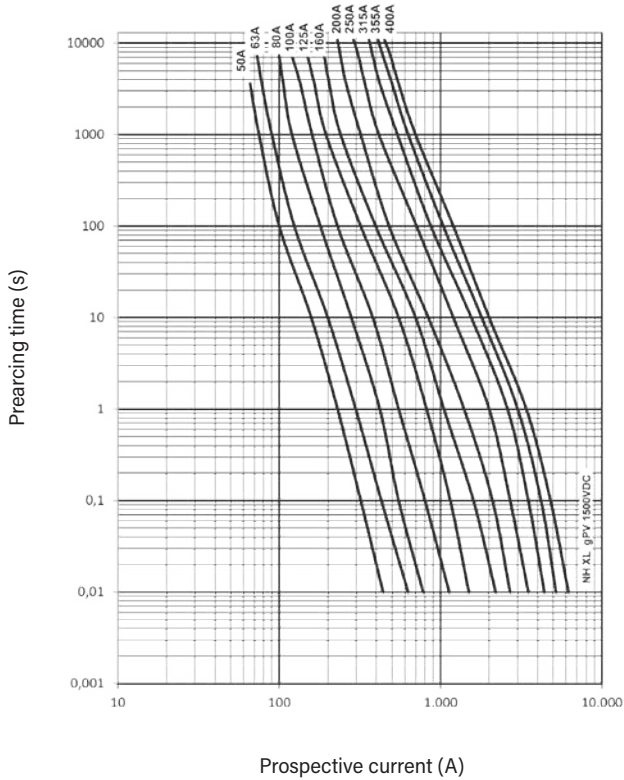

t-I CHARACTERISTICS



POWER DISSIPATION

	RATED CURRENT	REFERENCE		POWER DISSIPATION	POWER DISSIPATION	PREARcing I ² t	OPERATING I ² t
	(A)			(W @ 0,7 In)	(W @ In)	(A ² s)	(A ² s)
	40	372225	372225 B	6,3	15	260	490
	50	372230	372230 B	7,2	18	560	1.170
	63	372235	372235 B	7,6	19	1.160	2.460
	80	372240	372240 B	10	25	1.760	3.720
	100	372245	372245 B	10,4	26	3.970	8.380
	125	372250	372250 B	12	30	7.070	14.900
	160	372255	372255 B	15	38	13.360	28.180
	200	372260	372260 B	19	47	24.850	52.400
	200	372350	372350 B	18	45	24.850	52.360
	250	372360	372260 B	21	52	42.000	88.500
	315	372445	372445 B	23	58	69.020	145.550
	355	372450	372450 B	26	65	99.390	209.600
	400	372455	372455 B	28	71	155.300	327.500