

PHOTOVOLTAIC


FUSE-LINKS & FUSE HOLDERS FOR PHOTOVOLTAIC APPLICATIONS

CYL

10/14x85

gPV
CYLINDRICAL
fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
1500V DC	20A...32A	10kA




DIMENSIONS



A	B	C
10,3	85	14,3

t-I CHARACTERISTICS

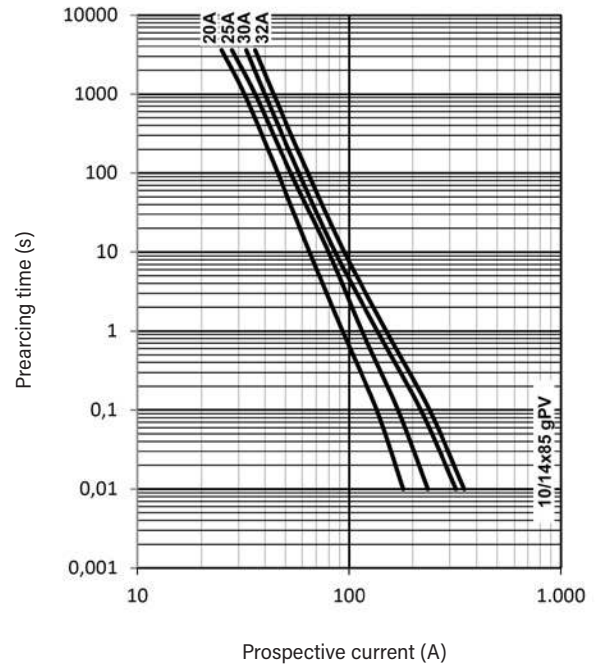

POWER DISSIPATION

RATED CURRENT (A)	REFERENCE	POWER DISSIPATION (W @ 0,7 In)	POWER DISSIPATION (W @ In)	PREARCIING I ² t (A ² s)	OPERATING I ² t (A ² s)
20	492250	2,17	5,44	67	221
25	492255	2,46	6,22	136	452
30	492260	2,66	6,70	220	730
32	492262	3,00	8,00	267	885