

PHOTOVOLTAIC

FUSE-LINKS & FUSE HOLDERS FOR PHOTOVOLTAIC APPLICATIONS




gPV
CYLINDRICAL
fuse links

RATED VOLTAGE 1000V DC
RATED CURRENT 1A...20A
BREAKING CAPACITY 30kA




DIMENSIONS

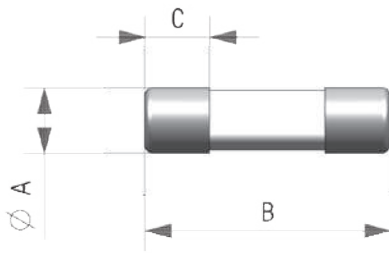

A	B	C
10,3	38	10

t-I CHARACTERISTICS

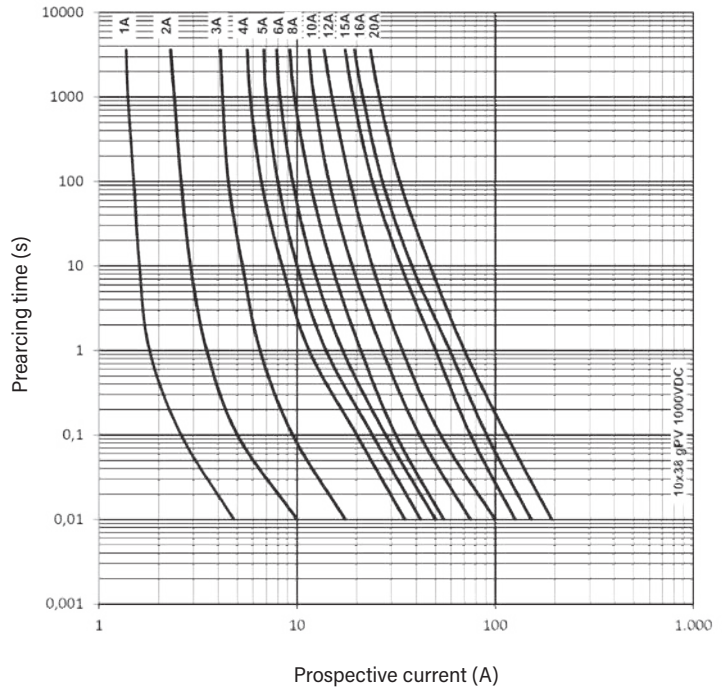

POWER DISSIPATION

RATED CURRENT (A)	REFERENCE	POWER DISSIPATION (W @ 0,7 In)	POWER DISSIPATION (W @ In)	PREARcing I ² t (A ² s)	OPERATING I ² t (A ² s)
1	491601	0,31	0,76	0,35	1,30
2	491602	0,78	1,45	0,62	1,00
3	491604	0,66	1,66	1,90	3,10
4	491605	0,64	1,57	6,90	11
5	491606	0,60	1,65	14	22
6	491610	0,77	1,84	24	38
8	491615	0,82	2,00	7	17
10	491620	0,94	2,20	15	38
12	491625	0,98	2,40	27	68
15	491629	1,05	2,65	62	115
16	491630	1,10	2,70	89	165
20	491635	1,33	3,20	158	294