

PHOTOVOLTAIC

FUSE-LINKS & FUSE HOLDERS FOR PHOTOVOLTAIC APPLICATIONS

CYL


10x85

gPV
CYLINDRICAL
fuse links


RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
1500V DC	2A...16A	30kA
1200V DC	20A 25A	10kA



DIMENSIONS

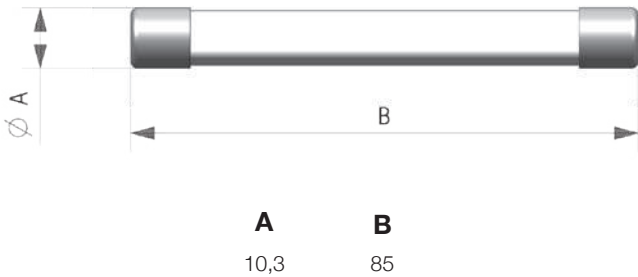

t-I CHARACTERISTICS

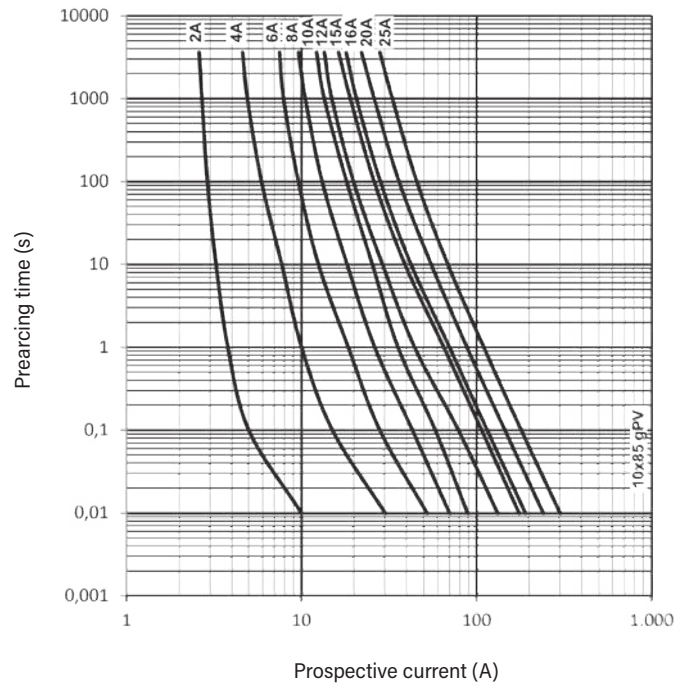

POWER DISSIPATION

U	RATED VOLTAGE	RATED CURRENT	REFERENCE	POWER DISSIPATION	POWER DISSIPATION	PREARcing I ² t	OPERATING I ² t
		(A)		(W @ 0,7 I _n)	(W @ I _n)	(A ² s)	(A ² s)
U	1500V DC	2	492202	1,28	3,2	0,8	1,1
		4	492205	1,16	2,9	13	17
		6	492210	1,04	2,6	65	84
		8	492215	1,13	2,8	175	225
		10	492220	1,36	3,4	44	72
		12	492225	1,56	3,9	78	129
		15	492229	1,79	4,5	121	201
		16	492230	1,92	4,8	175	290
U	1200V DC	20	492235	2,04	5,1	242	478
		25	492240	2,20	5,5	545	1075