

PHOTOVOLTAIC

FUSE-LINKS & FUSE HOLDERS FOR PHOTOVOLTAIC APPLICATIONS

CYL


14x51

gPV
CYLINDRICAL
fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
1100V DC	15A 20A	10kA
1000V DC	25A 32A	30kA




DIMENSIONS

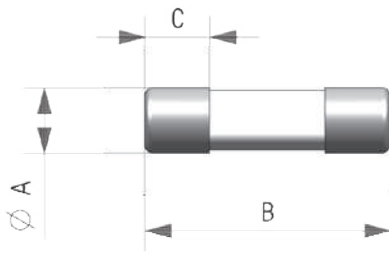

A	B	C
14,3	51	13

t-I CHARACTERISTICS

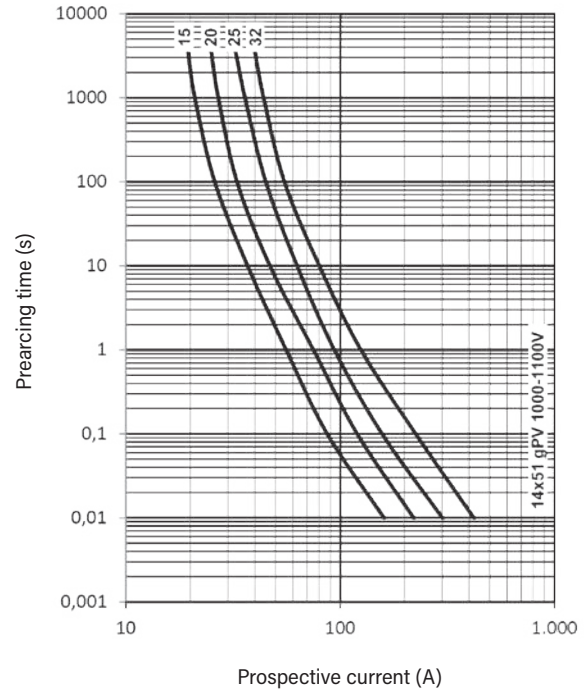

POWER DISSIPATION

	RATED VOLTAGE (V)	RATED CURRENT (A)	REFERENCE	POWER DISSIPATION	POWER DISSIPATION	PREARcing I ² t	OPERATING I ² t
				(W @ 0,7 I _n)	(W @ I _n)	(A ² s)	(A ² s)
U	1100V DC	15	491647	1,34	3,14	48	112
		20	491648	1,55	3,68	99	367
U	1000V DC	25	491650	1,60	3,80	275	650
		32	491655	2,00	4,70	550	1300